



C

**OPERATING LIMITS**


Pressure: 0.6 MPa

Speed: 10 m/s

Temperature: -30 °C ~ 200 °C



Type	d1	d7	d3	L1	L3
P14 C	14	29.5	31.5	32	8
P15 C	15	29.5	31.5	26/32	8
P16 C	16	29.5	31.5	26/32	8

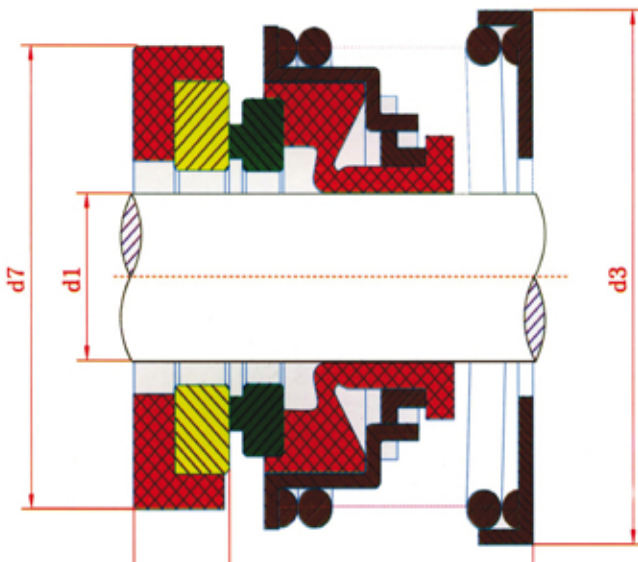

- **Stationary Ring** (Ceramic/SiC/TC)
- **Rotary Ring** (Carbon/ SiC/TC)
- **Secondary Seal** (NBR/ EPDM/VITON)
- **Spring & Other Parts** (S.S./SUS304/SUS316)